




5 ANS GARANTIE

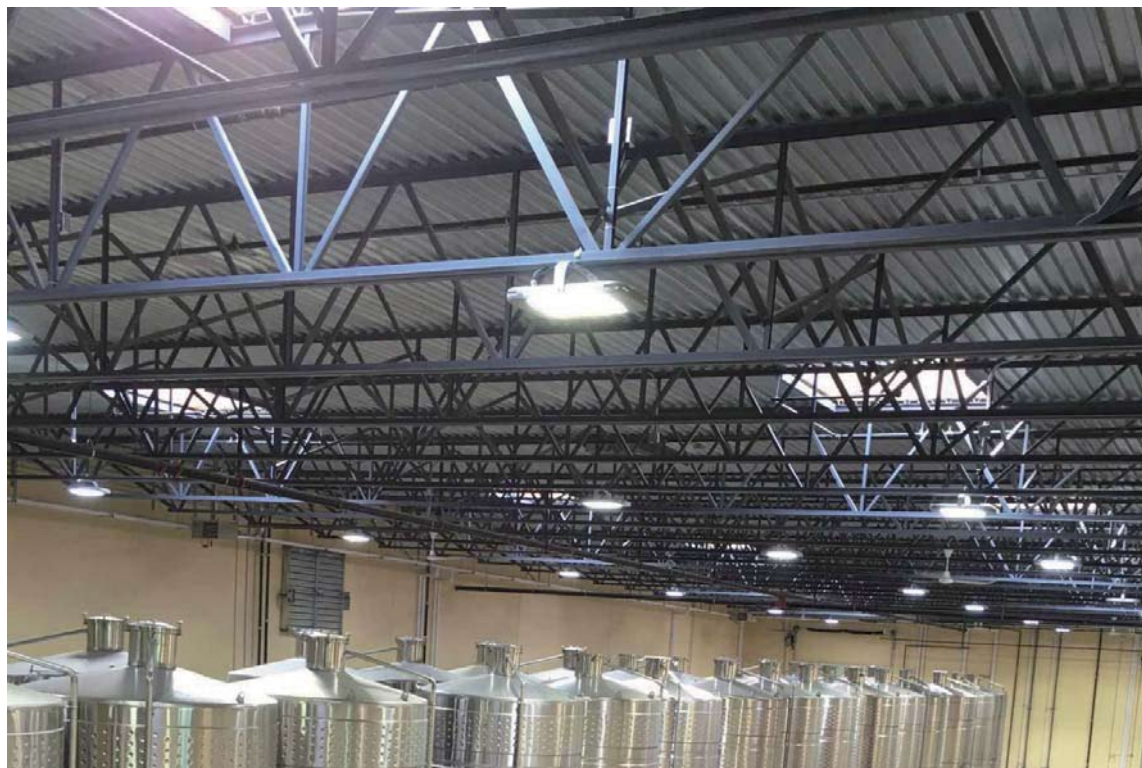

SPECIFICATIONS

REFERENCES	PUISSANCE	QUANTITE DE LED	LED MARQUE	LUMENS	CERTIFICATIONS
PLAFONNIER-3535-40W	40W	1	PHILIPS 3030 2D	5200	CE /ROHS
PLAFONNIER-3535-50W	50W			6250	CE /ROHS
PLAFONNIER-3535-80W	80W	2		10400	CE /ROHS
PLAFONNIER-3535-100W	100W			12500	CE /ROHS
PLAFONNIER-3535-120W	120W	3		15600	CE /ROHS
PLAFONNIER-3535-150W	150W			18750	CE/ROHS
PLAFONNIER-3535-160W	160W	4		20800	CE /ROHS
PLAFONNIER-3535-200W	200W			25000	CE /ROHS
PLAFONNIER-3535-200W	200W	5		26000	CE /ROHS
PLAFONNIER-3535-240W	240W			30000	CE/ROHS


INFORMATIONS COMPLEMENTAIRE

Voltage	100-240 /277Vac /50 /60Hz
CRI	>70
Protection	IP66, IK10
Efficacité lumineuse	125~130lm /w
Materiaux	Alliage d'Aluminium
Installation	Ajustable selon l'installation
Maintenance	L70>75,000 hours

INFORMATION POUR DEVIS


Designation	Lanterne-Led-Model_Lampe-puissance
Marque	EnergieDouce
LED Marque	PHILIPS LUXEON 3030 2D
Angle	60°, 90°, 110°
Chaleur	4000 /5000 /5700K
Coloris	Argent
En option	Detecteur de mouvement

DIMENSIONS




NOMBRE DE LED(S)	1	2	3	4	5
"L" Longueur	293 mm	366 mm	439 mm	512 mm	585 mm
H	156 mm				
H avec anse	186 mm	223 mm	259 mm	296 mm	332 mm
Poids	3.1 kg	4.4 kg	5.4 kg	6.3 kg	7.2 kg

EMBALLAGE



NOMBRE DE LANTERNE(S)	1	2	3	4	5
"L" Longueur	345 mm	415 mm	485 mm	560 mm	635 mm
Poids	3.9 kg	5.1 kg	6.1 kg	7.0 kg	8.1 kg

FLUX LUMINEUX

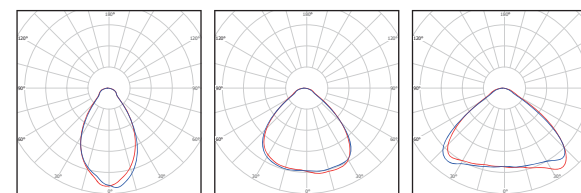

Lens code: 60°

Lens code: 90°

Lens code: 110°